

Marvin Clad Corner Window Measuring Instruction

Before You Begin

IMPORTANT

Marvin Clad Corner Window is not load-bearing and should not be installed in any manner that places the unit under load from the wall system. Care must be taken with the design of the structure surrounding these units.

- These measuring instructions cover the following product types: Marvin Clad Ultimate Casement Corner Window or Marvin Clad Direct Glaze Corner Window.
- The Marvin Clad Corner Window may be ordered by: Rough Opening (RO), Masonry Opening (MO), or Frame Size (FS). See the definitions below of these measurements.

NOTE: Numbers listed in parentheses () are metric equivalents in millimeters to the nearest whole number.

You will need to supply:


Tape measure

Measurement Definitions

1. **Rough Opening (RO)** is a measurement of the wall opening that provides clearance on three sides of the window for proper installation, insulating, and shimming. **RO Height** = FS Height + $\frac{1}{2}$ ". **RO Width** = FS Width + $\frac{1}{2}$ " for each leg (side).
 - Separate RO width measurements are required for each leg (side) of the corner window.
 - Include the exterior sheathing in the FS Width measurement.
 - In some instances, this measurement may need to account for rigid insulation if the nailing fin (sealing plane) is to the exterior of the insulation.
2. **Masonry Opening (MO)** is $\frac{1}{4}$ " wider than each FS Width (i.e. FS₁ and FS₂) and $\frac{1}{4}$ " higher than FS Height. **MO Height** = FS Height + $\frac{1}{4}$ ", or Outside of Exterior Casing + $\frac{1}{4}$ ". **MO Width** = FS Width + $\frac{1}{4}$ ", or Outside of Exterior Casing + $\frac{1}{4}$ ".
3. **Frame Size (FS)** is a measurement of the frame width and height. **FS Height** is a measurement taken from the underside of the sill to the top side of the head jamb. **FS Width** is a measurement taken from the outside of the jamb to the nailing fin (sealing plane) of the opposite leg (side) of the corner window.
 - Separate FS width measurements are required for each leg (side) of the corner window.

Marvin Clad Corner Window Section Details

- Measurement A:** Corner Window RO Height
- Measurement B:** Corner Window RO Left Leg (LH) Width
- Measurement C:** Corner Window RO Right Leg (RH) Width

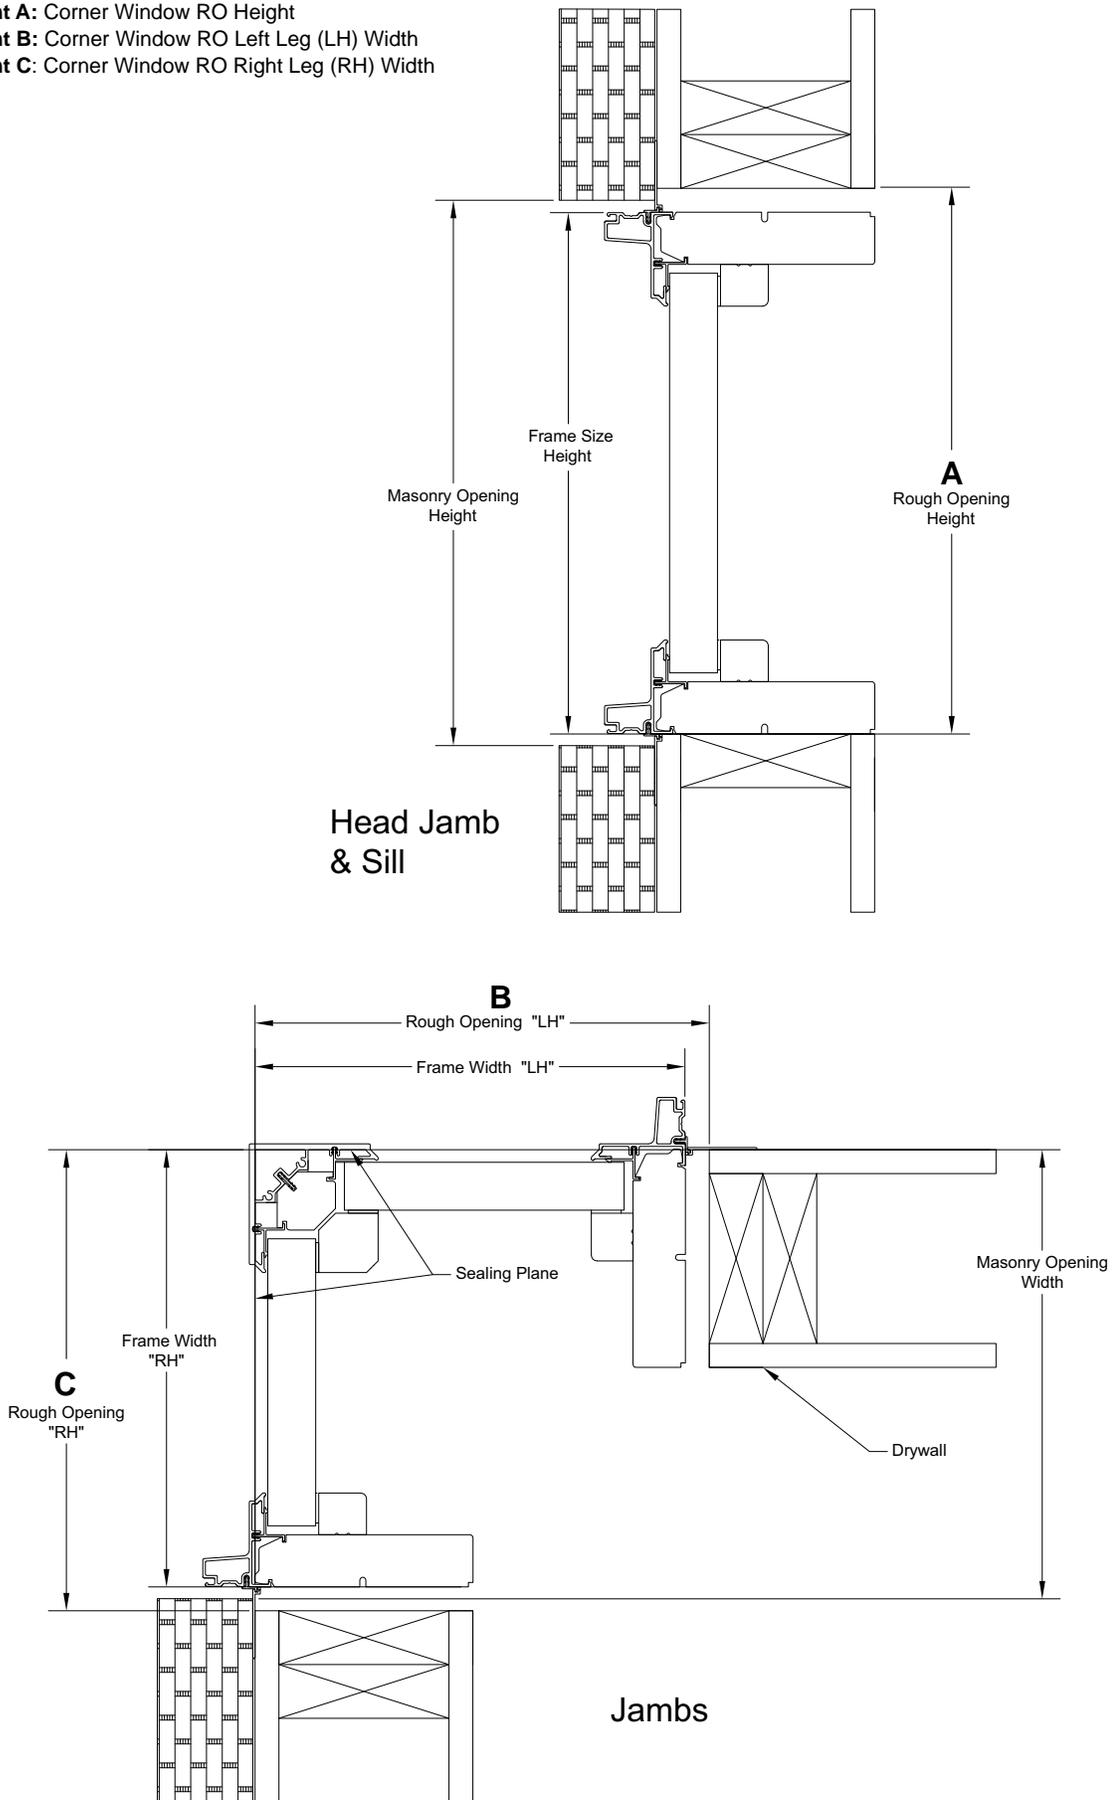

Framing Conversions

Framing RO Width is the measurement of the wall frame only, excluding any exterior sheathing and/or rigid insulation

If Sealing Plane is at the exterior of the Sheathing: **Framing RO Width** = RO Width – Exterior Sheathing.

Example: 36" RO width – 0.625" exterior sheathing = 35.375" framing RO (before sheathing)

If Sealing Plane is at the exterior of Rigid Insulation: **Framing RO Width** = RO Width – Exterior Sheathing – Exterior Rigid Insulation.

Example: 36" RO width – 0.625" Exterior Sheathing – 1" Rigid Insulation = 34.375" Framing RO Width (before sheathing/insulation)

